


Cylinder Head, Camshaft Drive and Valves

Cylinder Head and Valves

The cylinder head is cast from aluminum alloy and there are four valves per cylinder. The valve seat inserts and valve guides are of sintered metal. Oil seals are installed at the valve stems.

An internal duct is provided at number 4 exhaust port for exhaust gas recirculation purposes.

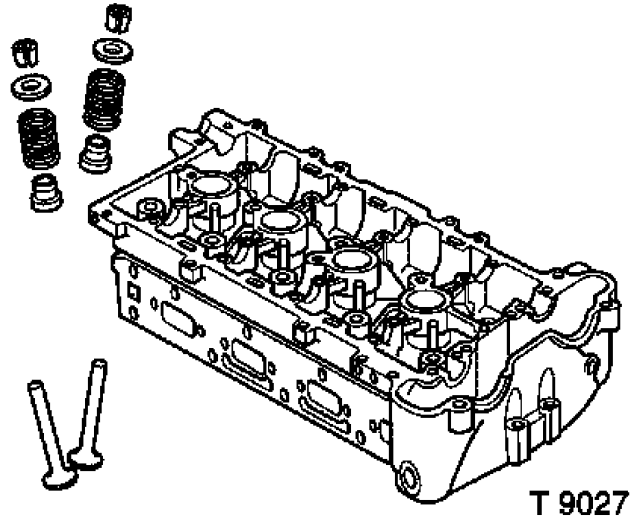

• Service

The cylinder head bolts must be renewed when the cylinder head is removed and installed.