


Front Bonnet, Remove and Install



Remove

1. Open front bonnet
2. Remove front bonnet
 - Remove 3 bolts, 3 washers (1)
Note: 2. Enlist the assistance of a second technician.
Note: Mark on the alignment mark.

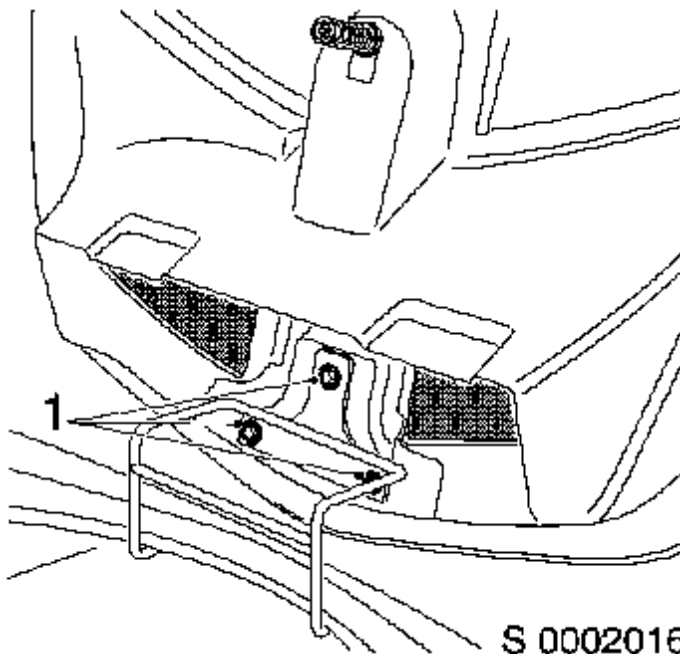

Install

3. Install front bonnet
 - Fit 3 bolts, 3 washers (1)
 - Align front bonnet
Note: 2. Enlist the assistance of a second technician

