



Radiator Grille, Replace

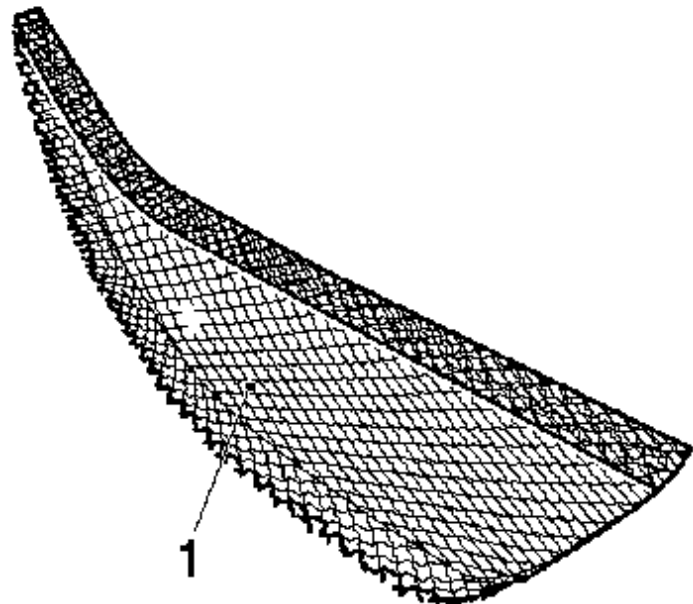

Remove

1. Remove front clamshell - see operation "Front Clamshell, Remove and Install"
2. Remove front emblem from radiator grille - see operation "Emblem, Front, Replace"
3. Roughly cut out radiator grille (1)
 - Use suitable tool
4. Cut off radiator grille flange from front clamshell
5. Cut off residues
6. Trim down adhesive beads

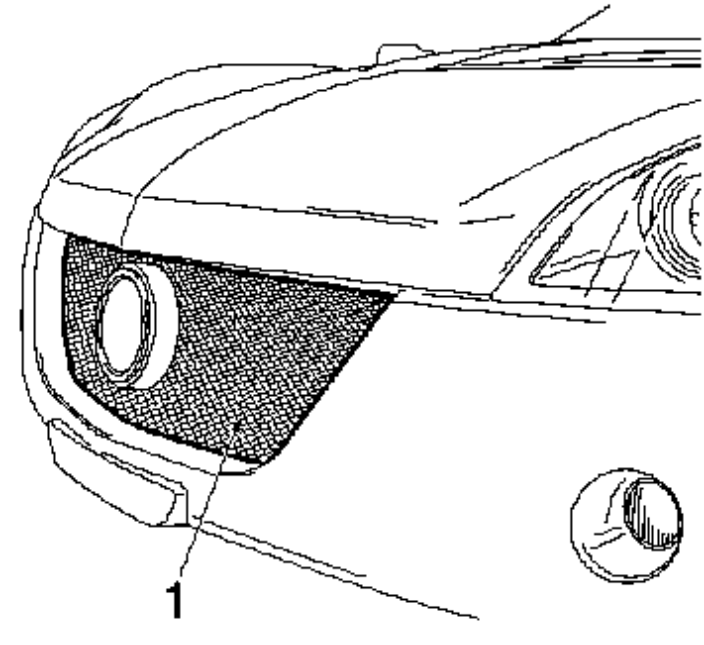

S 0005756



Install

7. Install new radiator grille to clamshell
 - Use suitable bonding adhesive
8. Install front emblem to radiator grille - see operation "Emblem, Front, Replace"

9. Install front clamshell - see operation "Front Clamshell, Remove and Install"