



Loudspeakers, Replace

1. Slide driver's seat forward
2. Remove driver's side loudspeaker cover
 - Pull off
3. Remove driver's side loudspeaker from trim panel
 - Remove 3x screw (1), release 2x harness connector

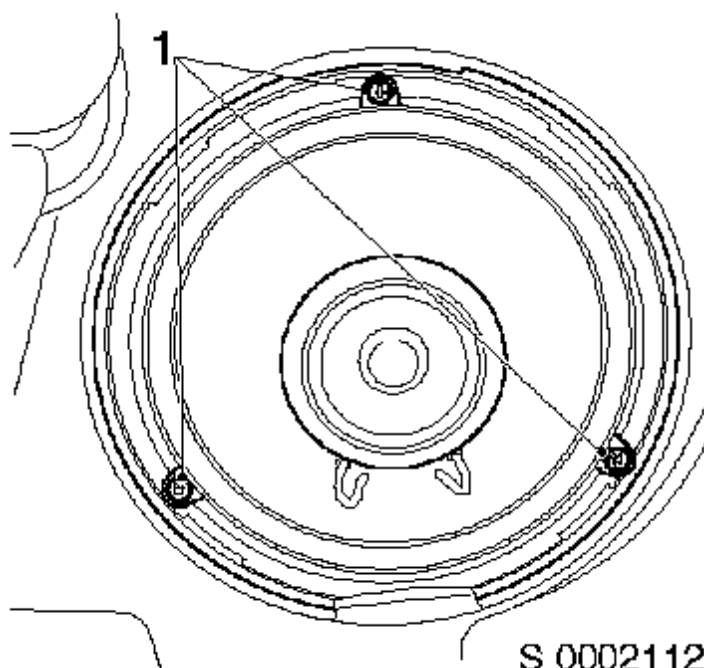

4. Install driver's side loudspeaker to trim panel
 - Secure 2x harness connector, install 3x screw
5. Install driver's side loudspeaker cover
 - Push fit
6. Remove passenger's side loudspeaker cover
 - Pull off

Note: Passenger's seat does not slide forward
7. Remove passenger's side loudspeaker from trim panel
 - Remove 3x screw, release 2x harness connector (1)

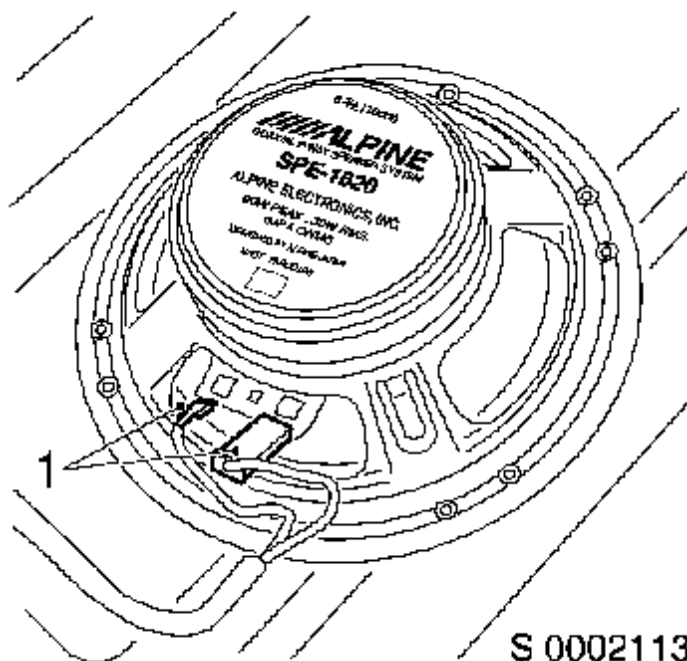

8. Install passenger's side loudspeaker to trim panel
 - Secure 2x harness connector, install 3x screw
9. Install passenger's side loudspeaker cover
 - Push fit