



Passenger's Seat, Remove and Install

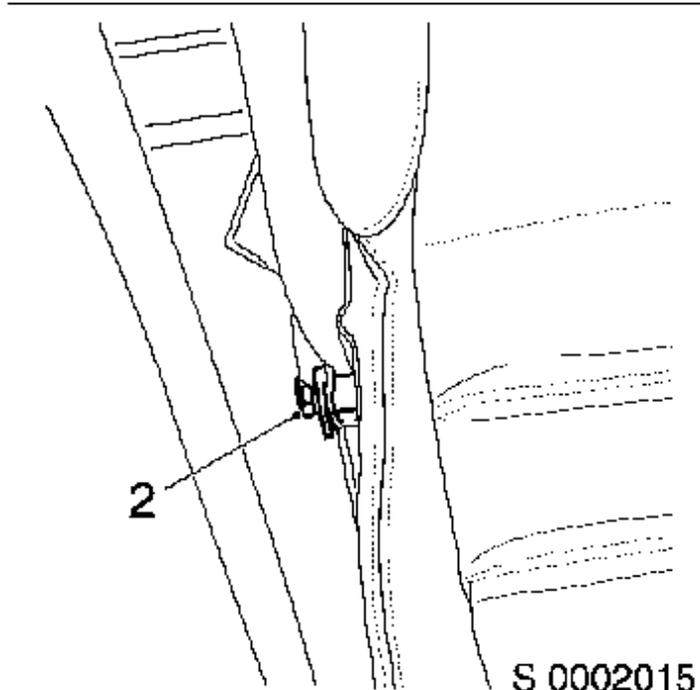

Remove

1. Remove soft top from vehicle – see operation “Soft Top, Remove and Install”
2. Remove seat from vehicle
 - Remove 4x bolt (1)
 - Remove anchor for seatbelt from passenger's seat
 - Bolt (2)

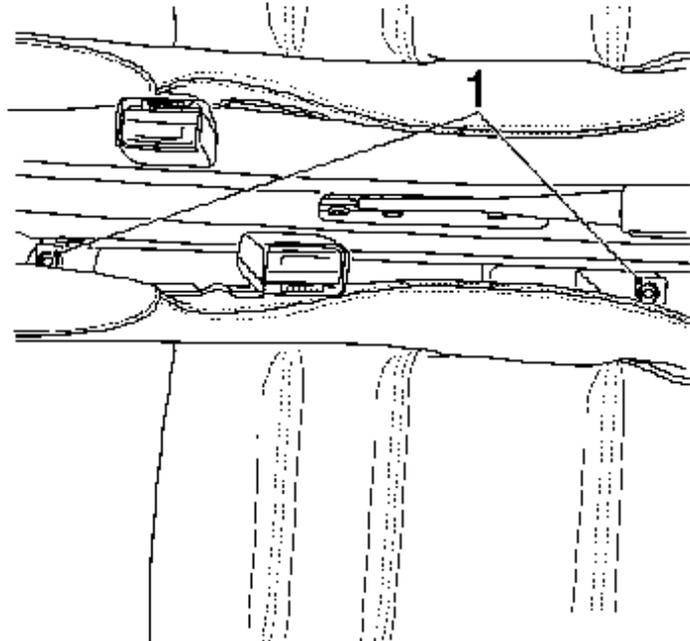

Install

3. Install passenger's seat to vehicle
 - Install 4x bolt
 - Install anchor for seatbelt to passenger's seat
 - Bolt

- Check for correct operation
4. Install soft top to vehicle