

Brake Caliper, Rear, Replace




Remove

Wheel from vehicle – bolts.

Parking brake cable from brake caliper.

Brake caliper from support bracket – M10 bolt and M8 screw.

Brake hose from brake caliper.

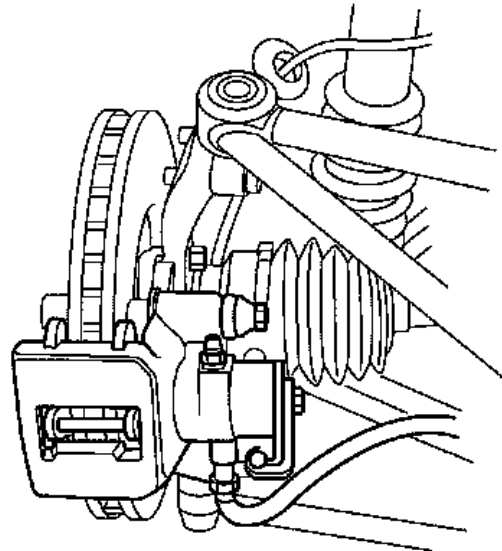

T 8772



Install

Brake hose to brake caliper.

Brake caliper to support bracket – M10 bolt and M8 screw; use suitable material to lock threads.

Parking brake cable to brake caliper.

Wheel to vehicle – bolts **90 Nm**.



Adjust

Caliper piston and brake pads – operate brake pedal several times to reset.

Bleed brakes – see operation "Brake System, Bleed".

Parking brake – see operation "Parking Brake, Check and Adjust".