

## Brake Caliper, Rear, Remove and Install




### Remove

Wheel from vehicle – bolts.

Parking brake cable from brake caliper.

Brake caliper from support bracket – M10 bolt and M8 screw; move brake caliper to one side.

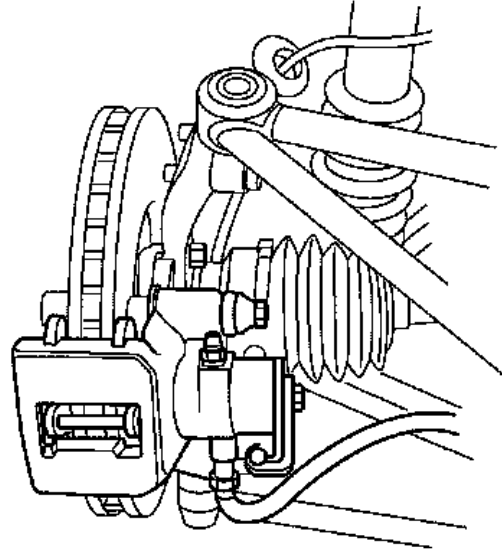

T 8772



### Install

Brake caliper to support bracket – M10 bolt and M8 screw; use suitable material to lock threads.

Parking brake cable to brake caliper.

Wheel to vehicle – bolts **90 Nm**.



### Adjust

Parking brake – see operation "Parking Brake, Check and Adjust".