
# Parking Brake Cable, Front, Replace



### Remove

Rear undertray (1) - 13 bolts, 13 washers.

Diffuser panel (2) – 7 bolts, 2 clips.

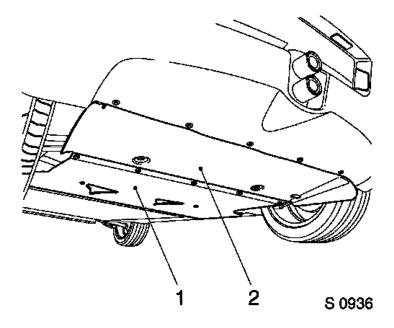

Fully release parking brake lever.



#### Remove

Parking brake trim from parking brake lever.

Parking brake cable (1) from parking brake lever – clip and pin.


Parking brake cable (1) from compensator – clip and pin.

Parking brake cable (1) from underbody.



## Clean

All components.

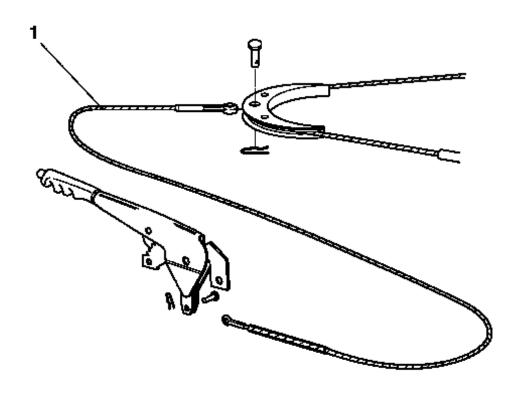

T 8778

Lubricate components with suitable grease.



# Install

Parking brake cable (1) to compensator – pin and clip.

Parking brake cable (1) to parking brake lever – pin and clip.


Parking brake trim to parking brake lever.



#### Adjust

Parking brake – see operation "Parking Brake,

Check and Adjust".

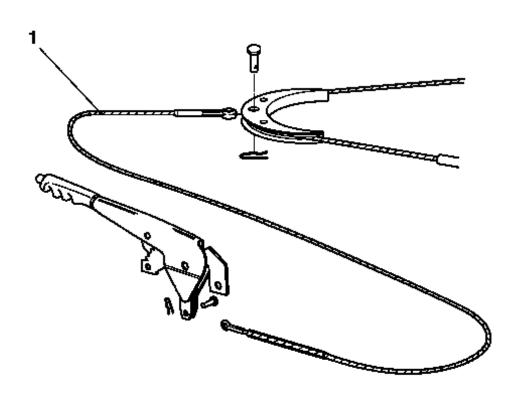

T 8778



Diffuser panel (2) - 7 bolts, 2 clips.

Important: Do not tighten bolts.



Rear undertray (1) - 13 bolts, 13 washers. Tighten diffuser and undertray bolts.

