

Brake Hose, Front, Remove and Install

Fill brake fluid reservoir to MAX mark and seal with blind cap.

Caution !

Seal orifices in brake line, brake hose and brake caliper to prevent ingress of foreign matter.



Remove

Wheel from vehicle – bolts.


Harness (4) from brake hose (2) – release from clip.

Clip (3) from upper wishbone – nut.

Brake line from brake hose (2) – union nut (5).

Brake hose (2) from bracket (1) – nut and washer.

Brake hose (2) from brake caliper.

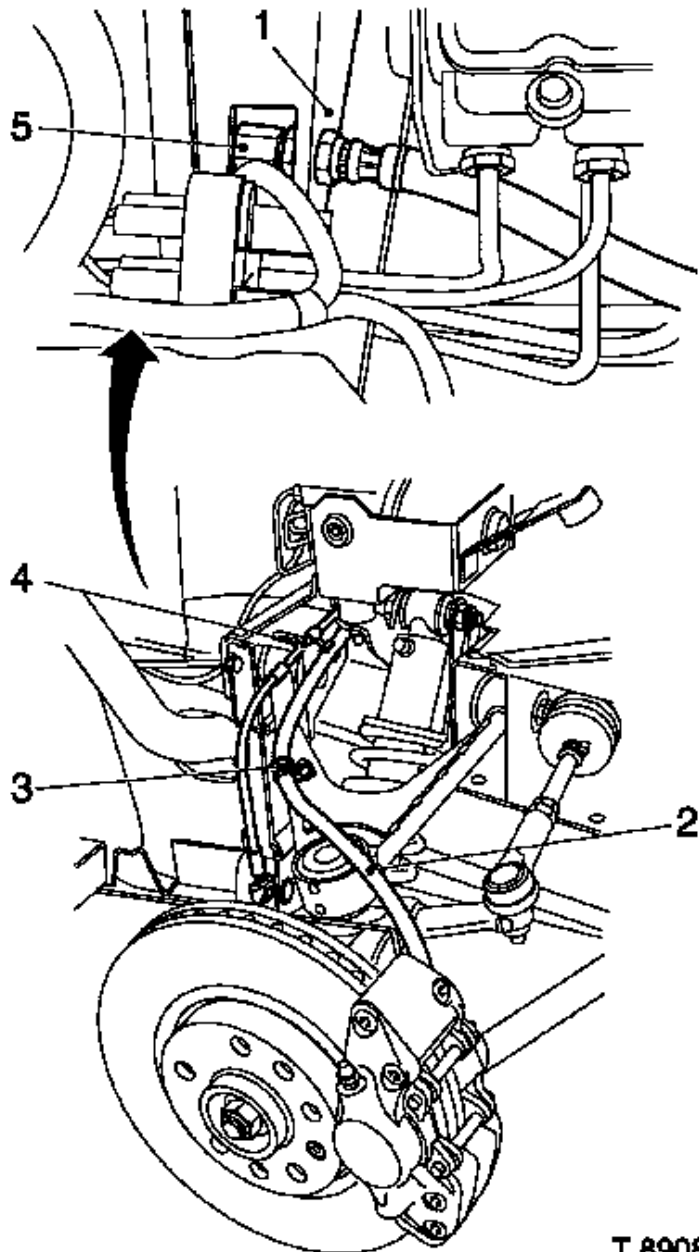

T 8908



Install

Brake hose (2) to brake caliper.

Brake hose (2) to bracket (1) – washer and nut.


Brake line to brake hose (2) – union nut (5).

Clip (3) to upper wishbone – nut.

Harness (4) to brake hose (2) – engage in clip.

Bleed brakes – see operation "Brake System, Bleed".

Wheel to vehicle – bolts **90 Nm**.

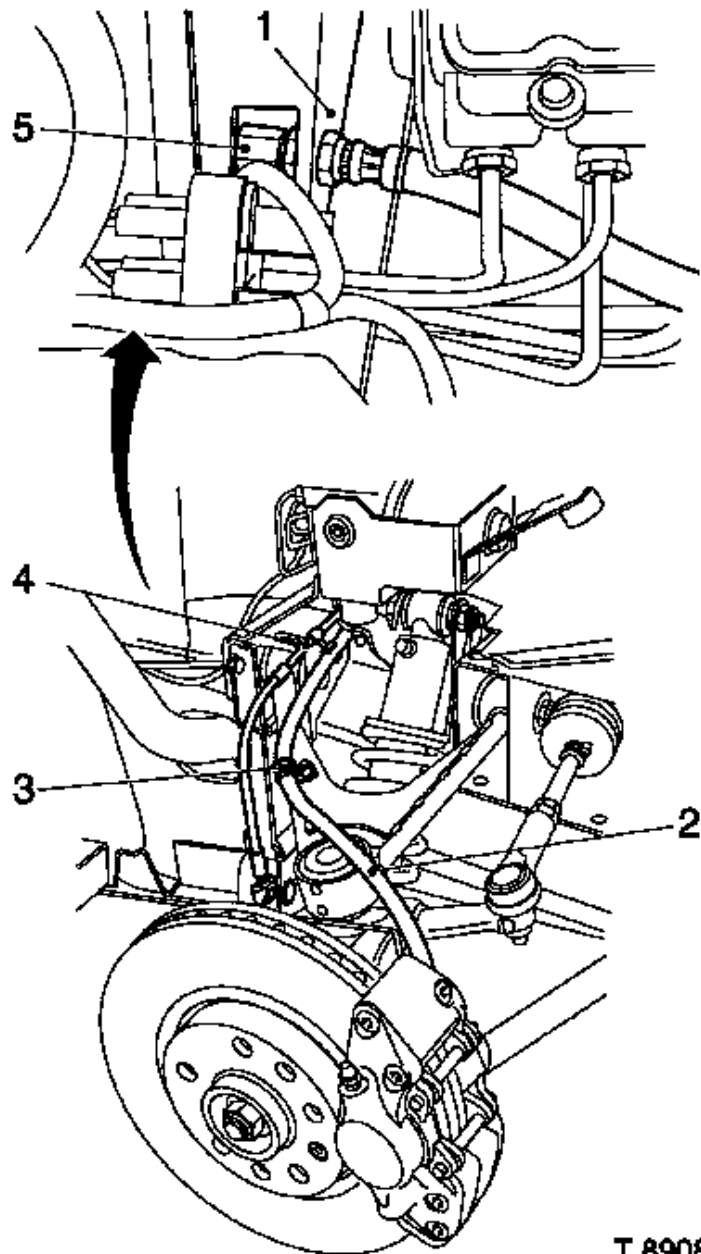

T 8908