


## Brake Pads, Rear, Replace




Remove


1. Chock both front road wheels
2. Release parking brake
- Important:** Avoid contact of brake fluid with paintwork.
3. Remove brake fluid reservoir cap
4. Raise and support vehicle
5. Remove rear road wheels
  - Remove 8x wheel bolt
  - Remove 2x security bolt
    - Use special socket located under front bonnet
6. Loosen parking brake adjustment - see operation "Parking Brake, Check and Adjust" in group H
7. Release parking brake cable (1) from brake caliper

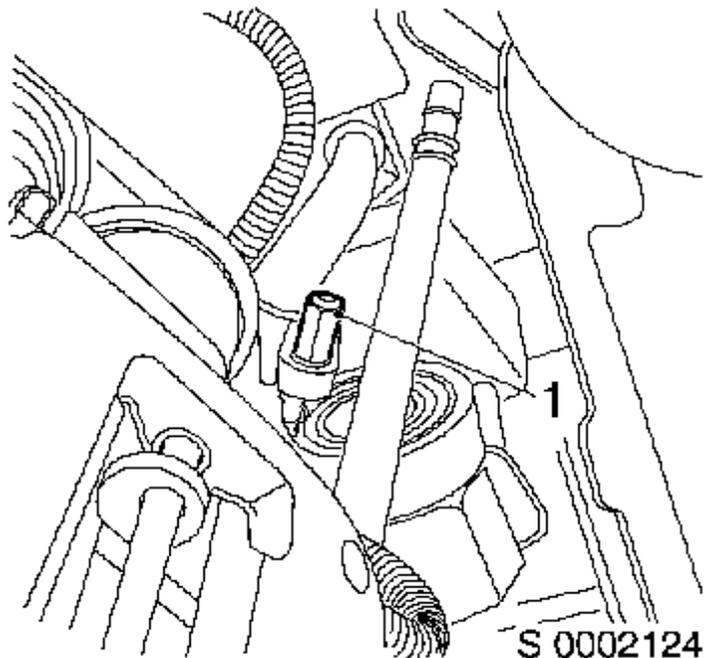


8. Release brake hose from lower wishbone
  - Release clip
  - Remove, then discard nut (1)

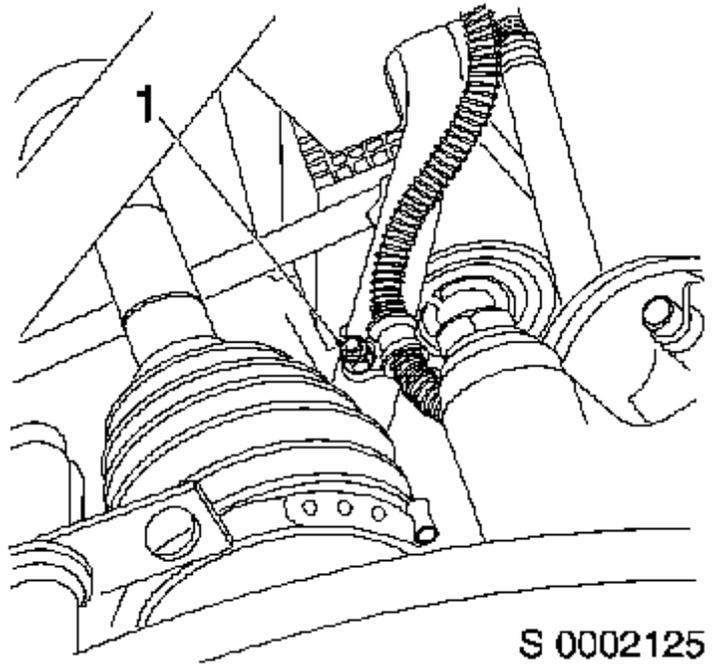

9. Remove pin (2) and anti-rattle spring (1)

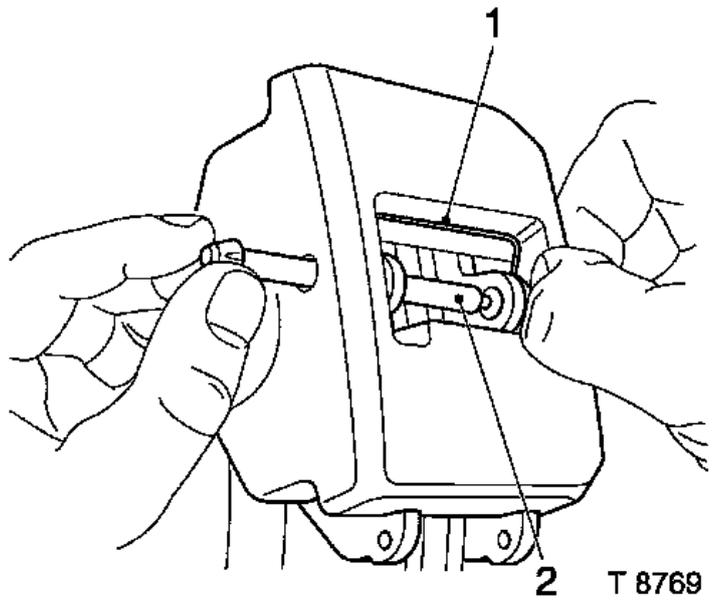


10. Tilt brake caliper upwards  
• Remove bolt (1)

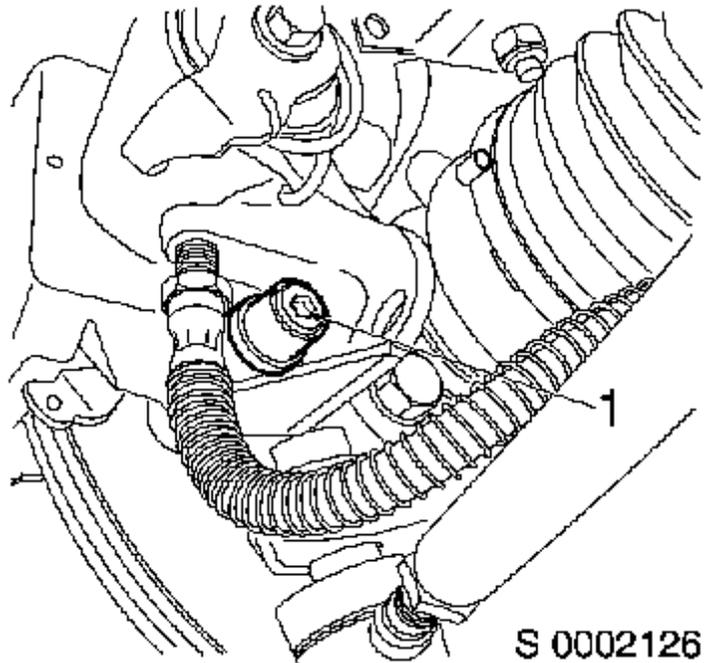

**Warning:** Avoid dust inhalation.

11. Remove brake pads from brake caliper
12. Remove rear brake disc
  - Remove screw
13. Wind piston back into brake caliper
  - Use Brake Piston Retractor **KM-6007** (1) with Adaptor **KM-6007-40**

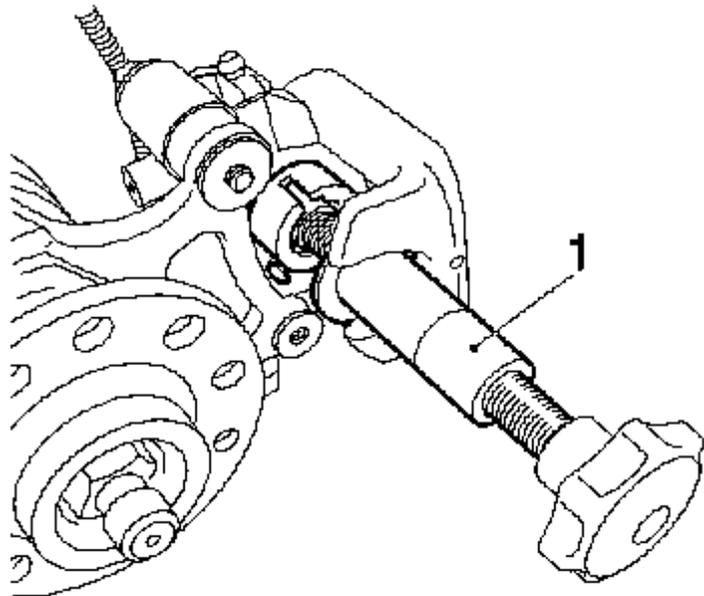

**Install**

14. Install rear brake disc
  - Install screw
15. Install brake pads to brake caliper
 

**Note:** Apply anti-squeal paste to brake pads.

16. Secure brake caliper to hub carrier
    - Install bolt **28 Nm**
      - Note:** Clean thread and apply locking compound.
  17. Install pin and anti-rattle spring
  18. Secure brake hose to lower wishbone
    - Secure clip
    - Install new nut
  19. Attach parking brake cable to brake caliper
  20. Install rear road wheels
    - Install 8x wheel bolt, 2x security bolt **90 Nm**
      - Use special socket located under front bonnet
  21. Lower vehicle and remove support
  22. Operate brake pedal several times
  23. Operate parking brake lever several times
  24. Raise vehicle
  25. Adjust parking brake - see operation "Parking Brake, Check and Adjust" in group H
  26. Lower vehicle
- Important:** Avoid contact of brake fluid with paintwork.
27. Check and top up brake fluid as required
    - Install brake fluid reservoir cap
  28. Apply parking brake
  29. Remove chocks from both front road wheels