


Switch, Reverse Lamp, Replace

1. Open bonnet
2. Remove windscreen wash reservoir from mounting bracket
3. Disconnect battery negative lead
 - Remove nut
4. Disconnect harness connector (1) from reverse lamp switch

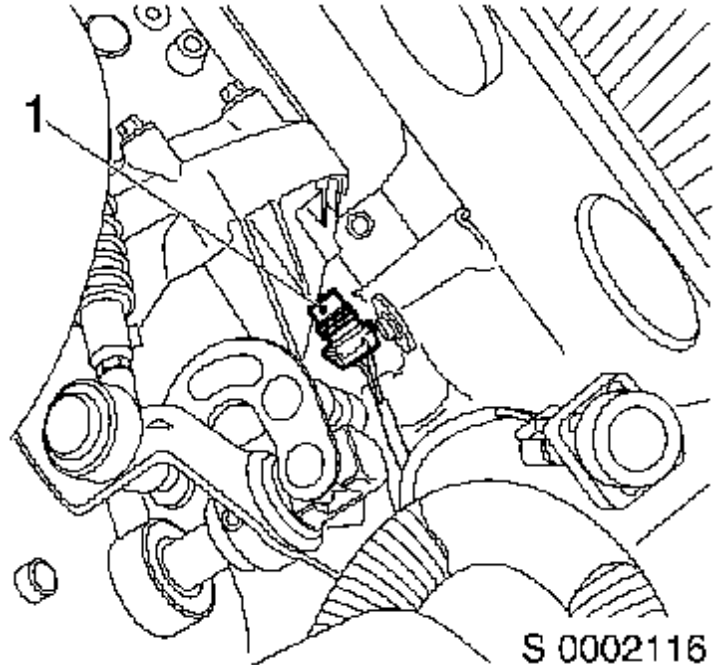

5. Remove reverse lamp switch from transmission
6. Install reverse lamp switch to transmission **20 Nm**
7. Secure harness connector to reverse lamp switch
8. Connect battery negative lead
 - Install nut
9. Install windscreen wash reservoir to mounting bracket
10. Close bonnet
11. Program all volatile memories