

Power Sounder, Anti-Theft, Remove and Install




Remove

Slacken nuts that hold power sounder to bracket.

Ease power sounder from bolts in bracket and pivot pip.

Harness connector from power sounder.

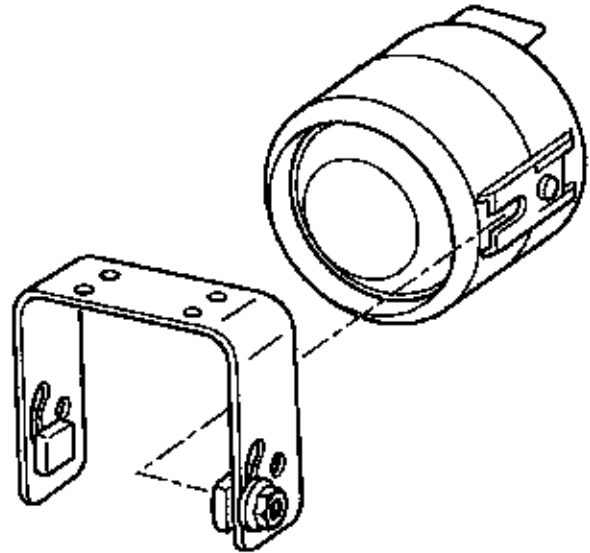

T 9393



Install

Harness connector to power sounder.

Power sounder to bracket, locate bolts heads into slots on sounder and pivot pip in bracket – tighten nuts.

Bracket shown removed for clarity.