



Switch, Hazard Warning Lamp Replace

1. Open bonnet
2. Remove windscreen wash reservoir from mounting bracket
3. Disconnect battery negative lead
 - Remove nut
4. Release switch panel assembly from instrument panel
 - Pull off

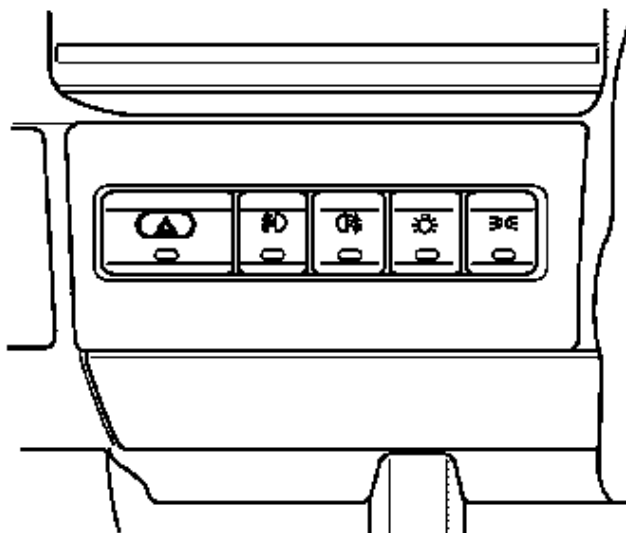

T 9093

5. Remove switch assembly from panel
 - Release 4x clip (arrowed)

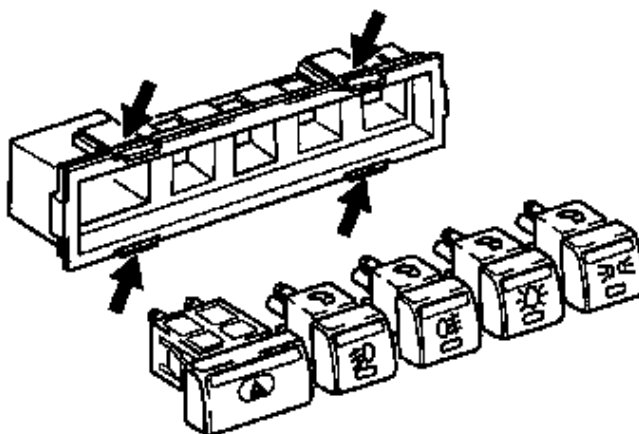

T 9103

6. Remove front cover from hazard warning lamp switch
 - Pull off
7. Remove hazard warning lamp switch from housing
 - Release 2x clip, release harness connector
8. Install hazard warning lamp switch to housing

- Secure 2x clip, secure harness connector
9. Install front cover to hazard warning lamp switch
 - Push fit
 10. Install switch assembly to panel
 - Secure 4x clip
 11. Secure switch panel assembly to instrument panel
 - Push fit
 12. Connect battery negative lead
 - Install nut
 13. Install windscreen wash reservoir to mounting bracket
 14. Close bonnet