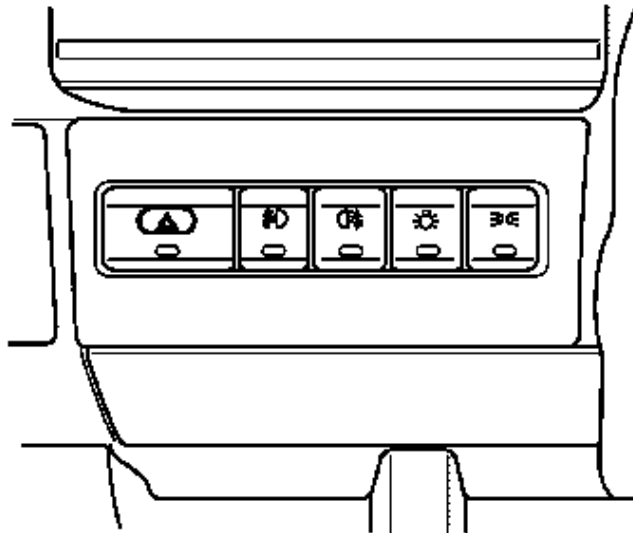
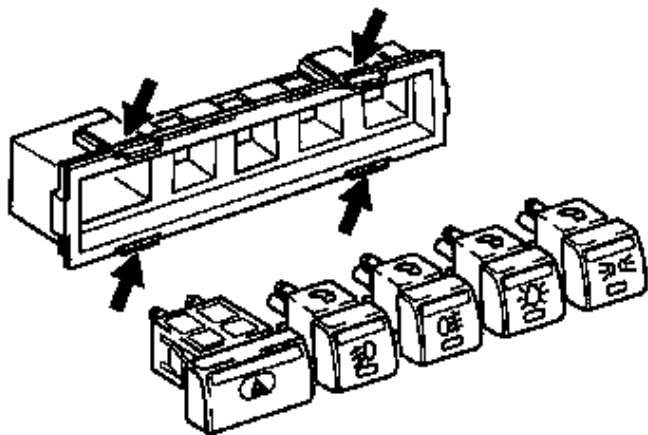


Switch, Fog Lamp, Remove and Install

1. Open bonnet
2. Remove windscreen wash reservoir from mounting bracket
3. Disconnect battery negative lead
 - Remove nut
4. Release switch panel assembly from instrument panel
 - Pull off

**T 9093**

5. Remove switch unit assembly from panel
 - Release 4x clip

**T 9103**

6. Remove front cover from fog lamp switch
 - Pull off
7. Remove fog lamp switch
 - Release 2x clip, release harness connector
8. Install fog lamp switch

- Secure 2x clip, secure harness connector
9. Install front cover to fog lamp switch
 - Push fit
 10. Install switch to housing
 - Secure 4x clip
 11. Secure fog lamp switch to instrument surround
 - Push fit