


## Wishbones, Front

The two wishbones are fabricated from steel tube. The inboard ends of the wishbones are equipped with bonded rubber bushes and a swivel joint is located in the outer end of each wishbone.

A nitrile-faced washer prevents metal to metal contact at the upper wishbone under extreme braking force. This washer is installed at the rear face of the front bush.

The illustration shows the left front wishbones.

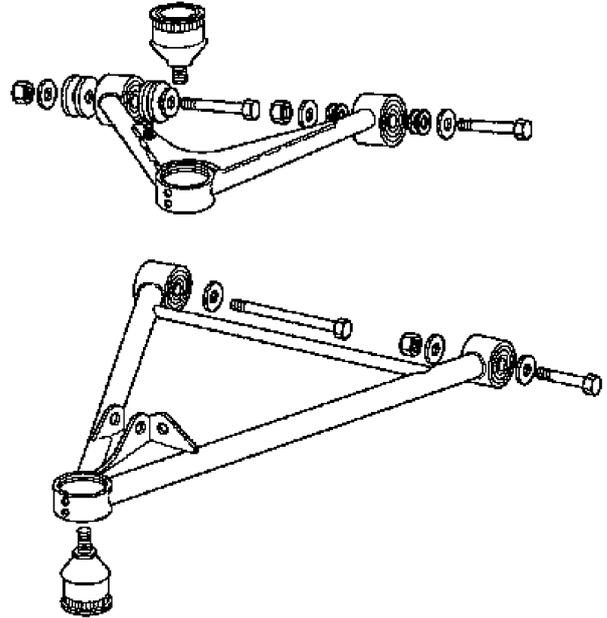

T 8739

### • Service

The bushes and swivel joint in each wishbone are pressed into position.