

Fuel Cutoff Impact Switch, Remove and Install



Remove

Harness connector from fuel cutoff impact switch (1).


Fuel cutoff impact switch from rear sub-frame – 2x screw, 2x washer.



Install

Fuel cutoff impact switch (1) to rear sub-frame – 2x screw, 2x washer.

Harness connector to fuel cutoff impact switch.

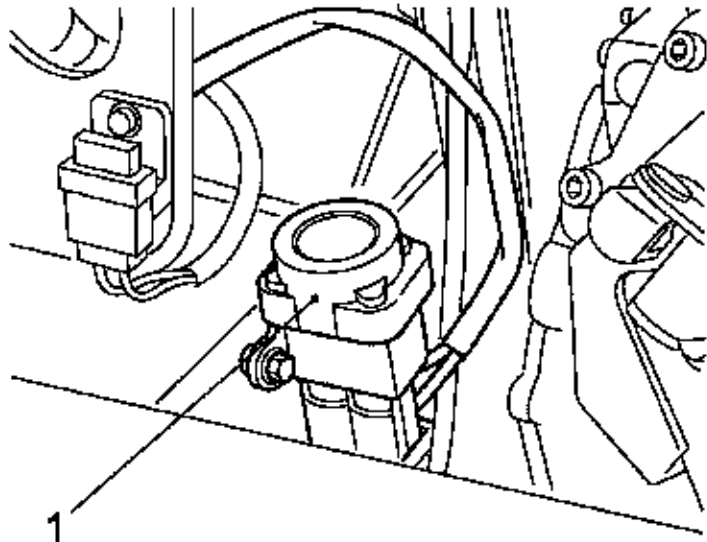

N0083