



Exhaust Heat Shield, Replace


1. Raise vehicle
2. Remove exhaust undertray (2) from rear clamshell and engine undertray (1)
 - Remove 8x bolt, 2x screw, 2x clip

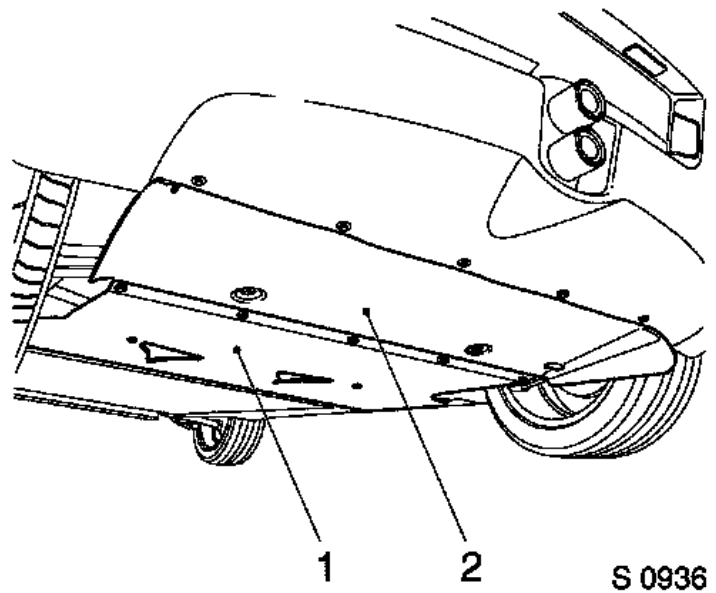

3. Release intermediate exhaust pipe from catalytic converter
 - Remove 3x bolt, 3x nut (1)

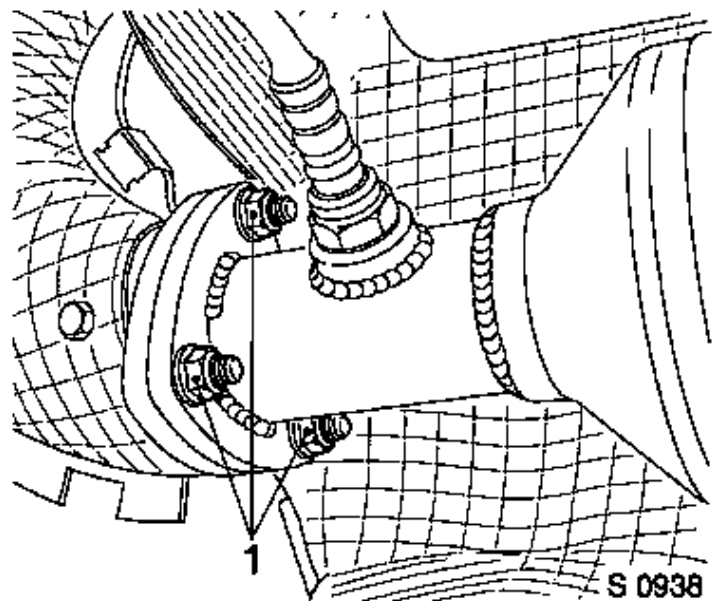

4. Remove intermediate exhaust pipe from rear silencer
 - Remove U-clamp (1)

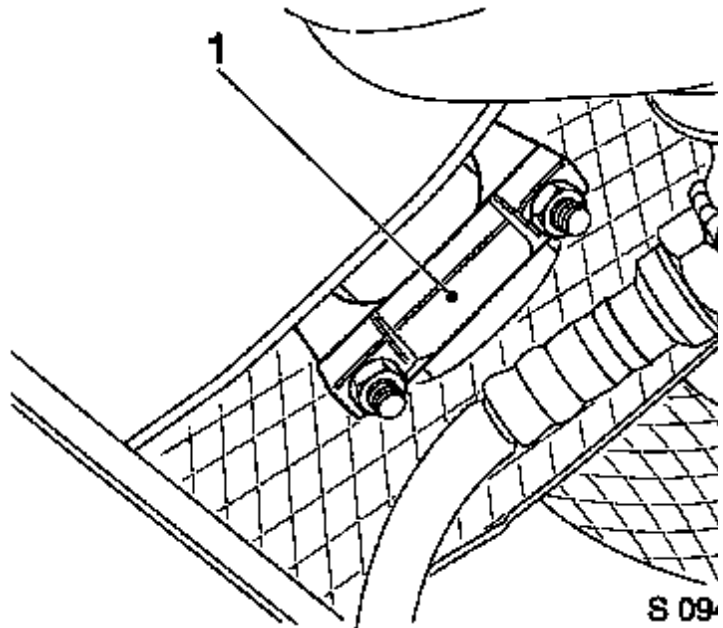

5. Clean all mating surfaces
6. Remove heat shield from intermediate exhaust pipe
 - Remove 4x bolt, 4x washer, 7x clip
7. Install heat shield to intermediate exhaust pipe
 - Install 7x clip, 4x washer, 4x bolt
8. Install intermediate exhaust pipe to rear silencer
 - Install U-clamp
9. Install intermediate exhaust pipe to catalytic converter
 - Tighten 3x bolt, 3x nuts
10. Install exhaust undertray to rear clamshell and engine undertray
 - Install 8x bolt, 2x screw 2x clip
11. Lower vehicle