



Mounting, Exhaust System, Replace


1. Raise vehicle
2. Remove exhaust undertray (2) from rear clamshell and engine undertray (1)
 - Remove 8x bolt, 2x screw, 2x clip

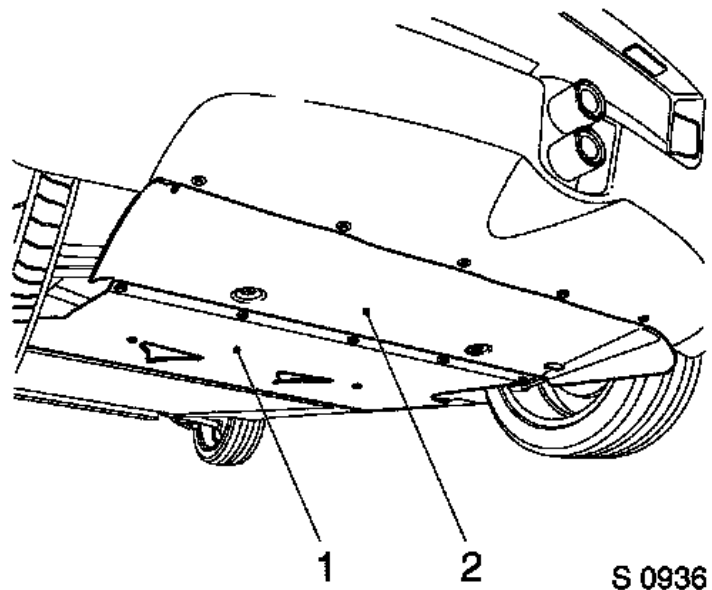


3. Remove lower heat shield (1) from exhaust manifold
 - Remove 3x bolt and clip

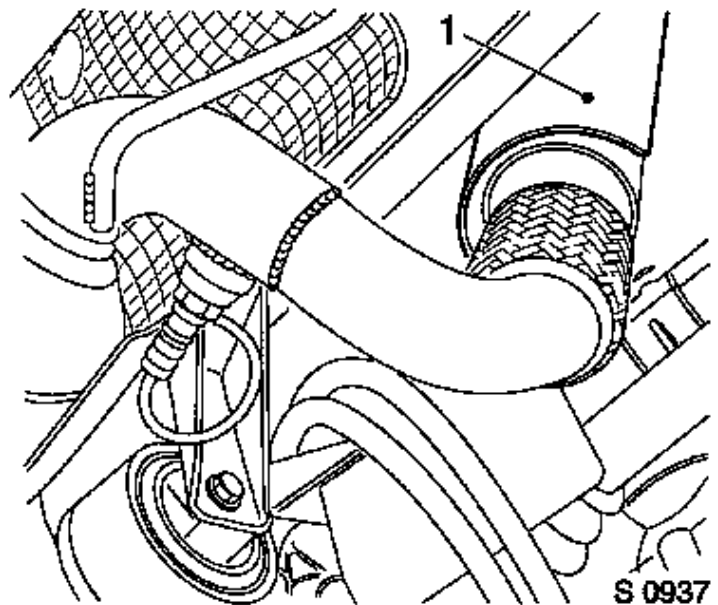


4. Remove oxygen sensor (1) from exhaust system

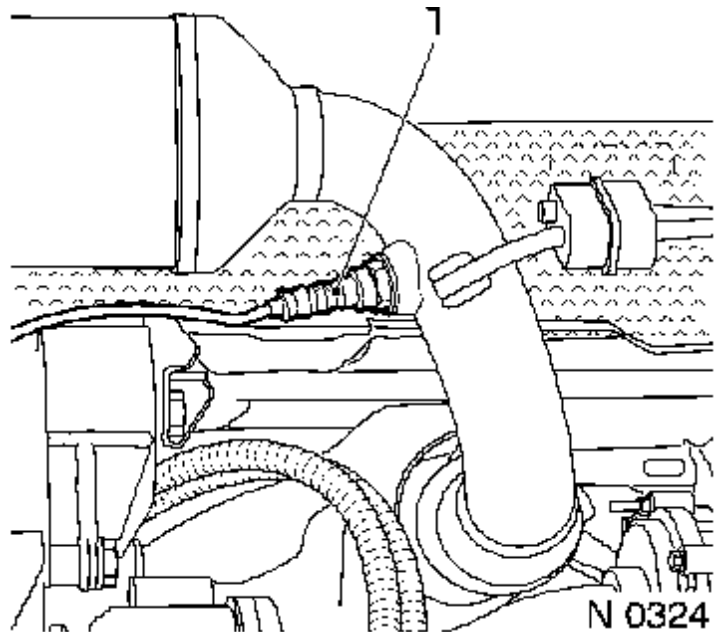

5. Remove oxygen sensor (1) from exhaust system

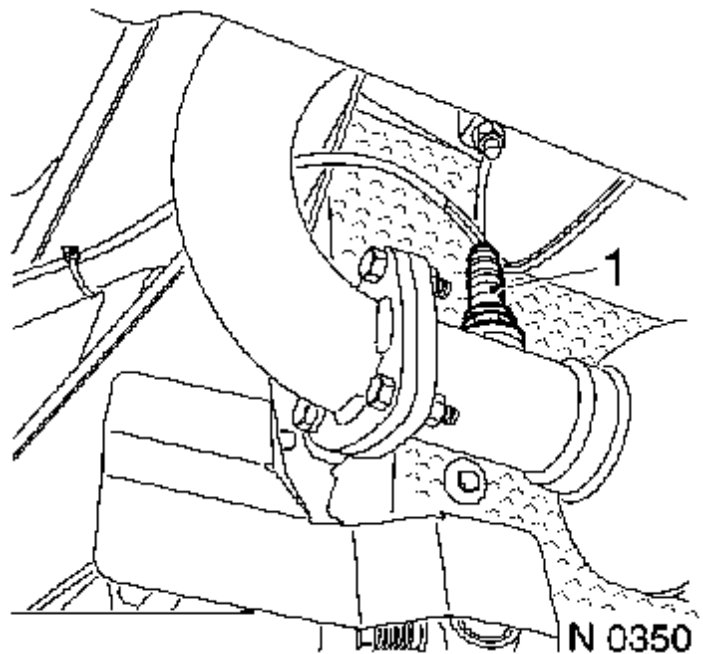

6. Remove exhaust down pipe/catalytic converter assembly from exhaust manifold
- Remove 6x nut (1), 3x bolt, gasket
7. Release mounting (2) from support bracket

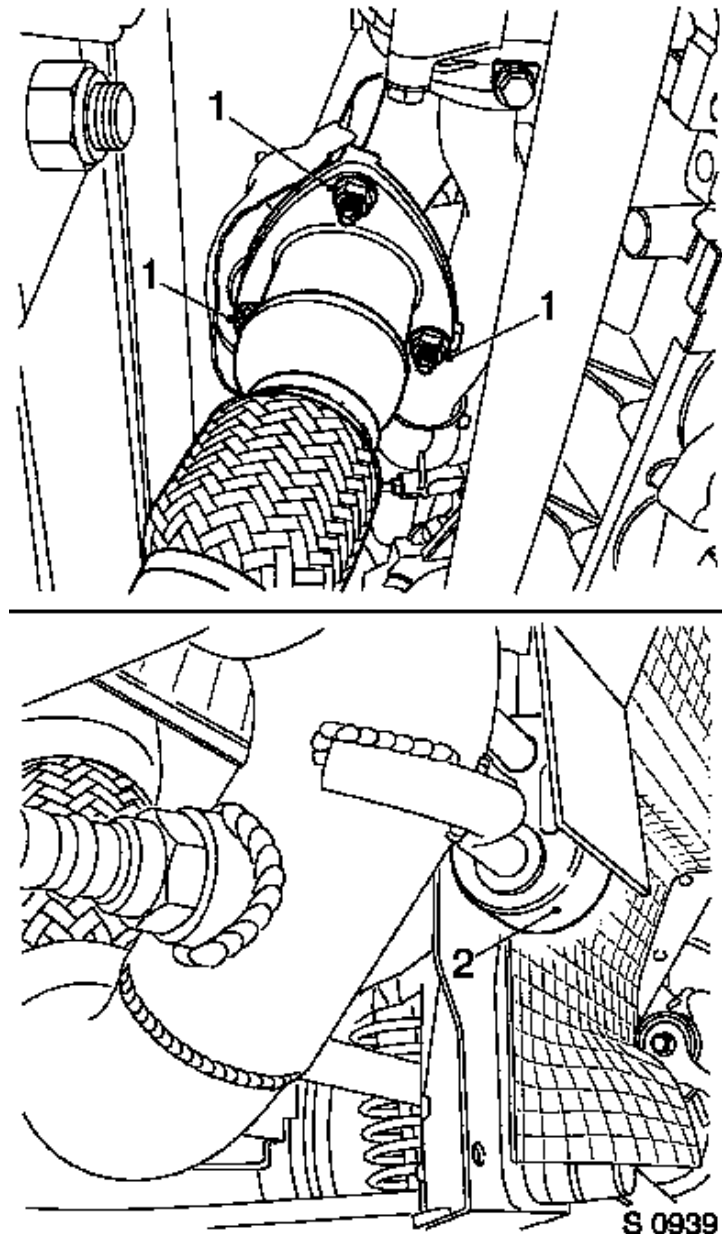

8. Install new mounting to support bracket
9. Install exhaust down pipe/catalytic converter assembly to exhaust manifold
 - Install new gasket, 3x bolt, 6x nut
10. Install 2x oxygen sensor to exhaust system
 - Apply special grease to the oxygen sensor thread
 - Tighten 2x sensor
11. Install lower heat shield to exhaust manifold
 - Install 3x bolt and clip
12. Install exhaust undertray to rear clamshell and engine undertray
 - Install 8x bolt, 2x screw 2x clip
13. Lower vehicle