
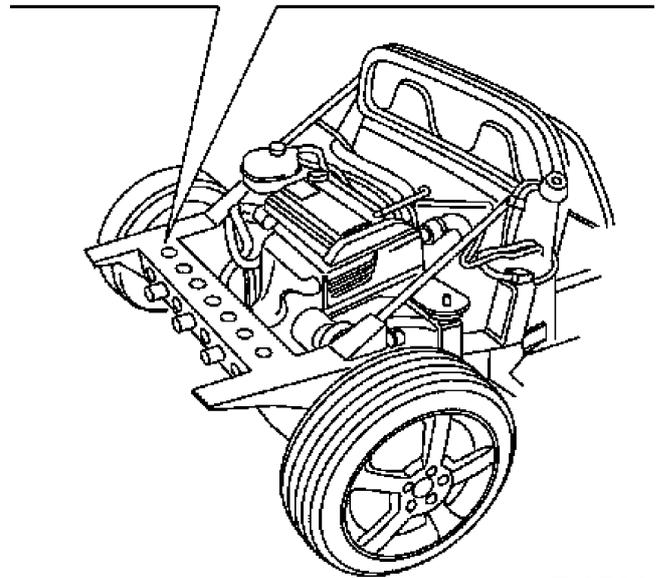


Rear Sub-frame

The rear sub-frame provides a mounting for the rear clamshell, the stays of the roll bar, the exhaust system, a torque reaction damping block for the engine, and the majority of the rear suspension.

Tubular ducts in the rear sub-frame enable air from the engine compartment to pass over the exhaust system.

The rear sub-frame is constructed from sheet steel and is secured to the rear of the chassis frame by means of four bolts.

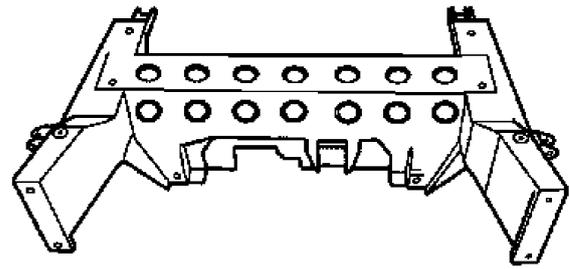

T 8720

• Service

Straightening of the rear sub-frame must not be performed. The rear sub-frame must be replaced if damaged.