

Liner, Rear Wheelarch, Remove and Install

Left side shown, right side similar.



Remove, Disconnect

Wheel - bolts.


Liner - 6 screws.



Install, Connect

Liner - 6 screws.

Wheel - bolts 90 Nm.

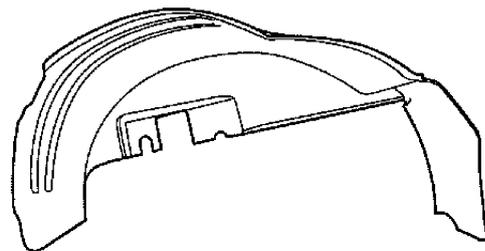

S 0789