

Shock Absorber, Remove and Install




Remove

Rear wheel from vehicle.

Rear wheel arch liner – screws, clips.

Shock absorber from lower wishbone – bolt, nut (1), washers.

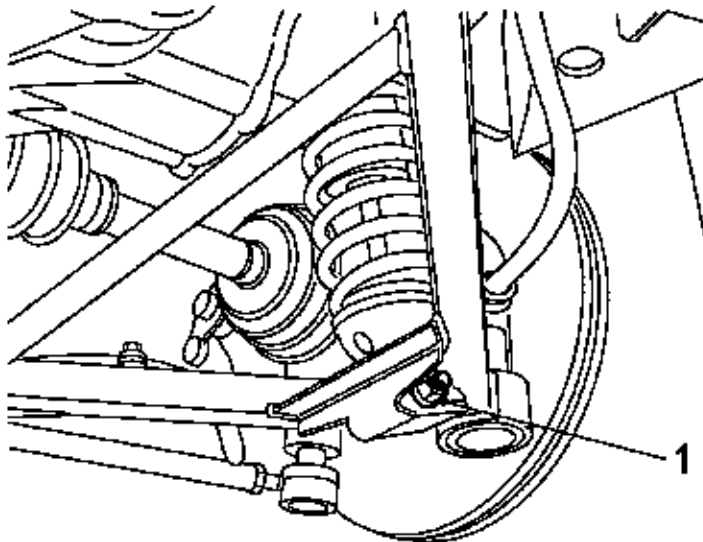

T 9367




Remove

Shock absorber from bracket on chassis – bolt, nut, washers.



Install

Shock absorber to bracket on chassis – bolt, nut **45 Nm**, washers.

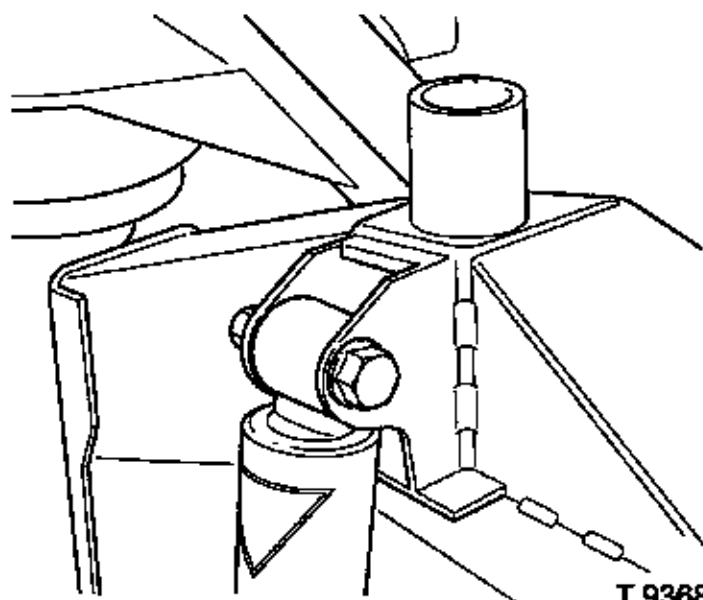


T 9368

Shock absorber to lower wishbone – bolt, nut (1) **45 Nm**, washers.

Rear wheel arch liner – screws, clips.

Rear wheel to vehicle – bolts **90 Nm**.

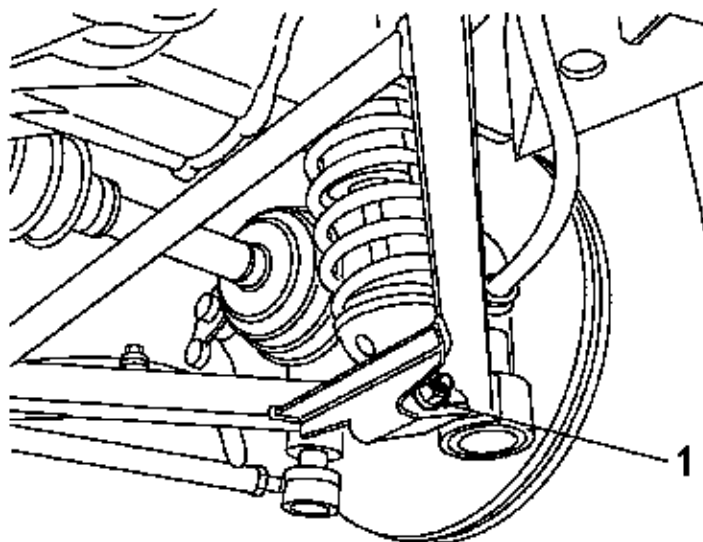

T 9367