

Suspension Wishbones, Track Control Rod


Lower Wishbone, Remove and Install



Remove, Disconnect

Clips for brake hose and parking brake cable from lower wishbone - nuts.

Shock absorber from lower wishbone - bolt, nut (1), washers.

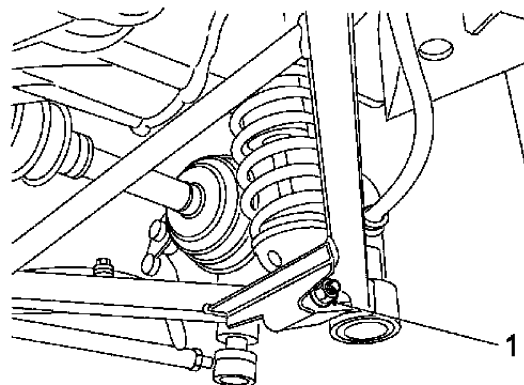


T 9370



Remove, Disconnect

Lower swivel joint from hub carrier - nut; use suitable ball joint remover (illustration shows wheel hub and drive shaft assembly removed for clarity).

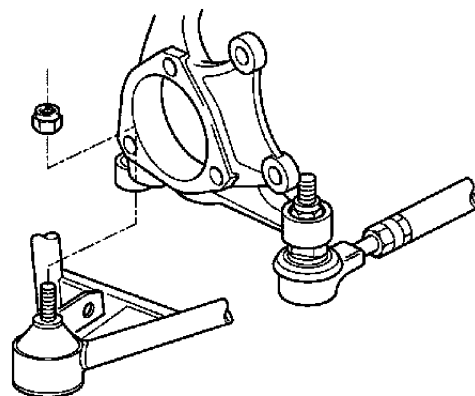

T9466



Remove, Disconnect

Track control rod (2) from lower wishbone and chassis - nut, washers.



Lower wishbone (1) from chassis - bolt at front pivot point, washer.



Install, Connect

Lower wishbone to chassis - bolt 45 Nm at front pivot point, washer.


Track control rod to lower wishbone and chassis - nut 49 Nm, washers.

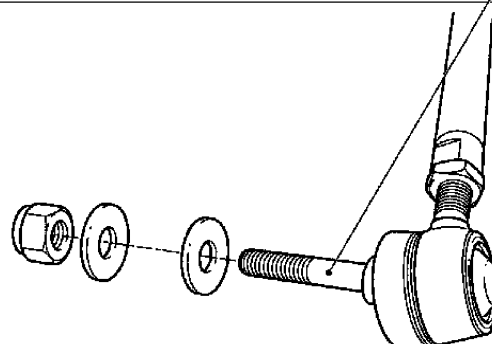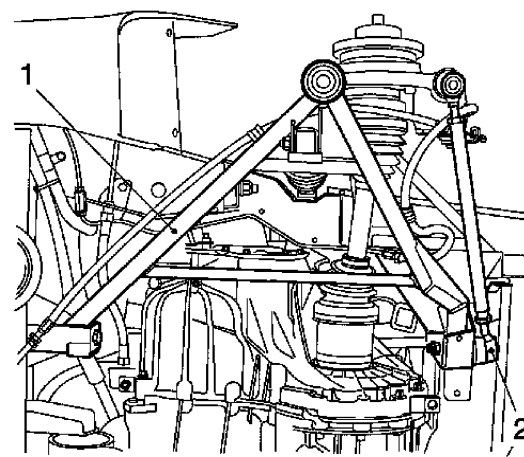



Install, Connect

Lower swivel joint to hub carrier - nut.

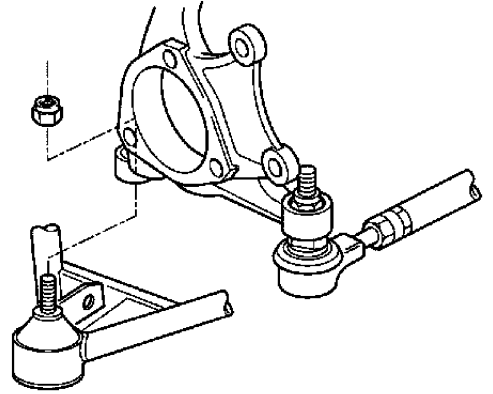


T9466



Install, Connect

Shock absorber to lower wishbone - bolt, nut 45 Nm, washers.

Clips for brake hose and parking brake cable to lower wishbone - nuts.

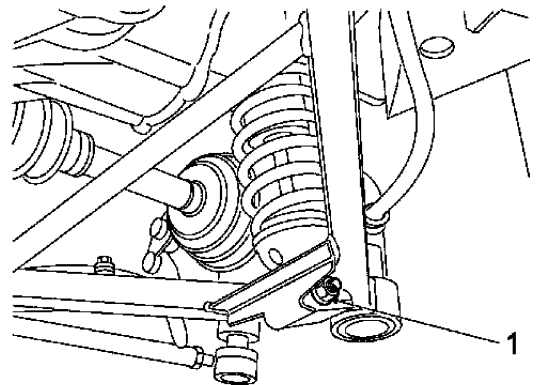


T 9370



Install, Connect

Wheel bearing assembly to hub carrier - see operation "Wheel Bearing Assembly, Remove and Install".

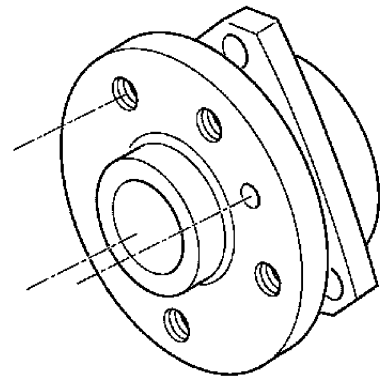

T 9340