


Upper Wishbone, Rear, Remove and Install



Remove

Upper swivel joint from ball joint carrier (1) – nut (2); use suitable ball joint remover to separate swivel joint from ball joint carrier.

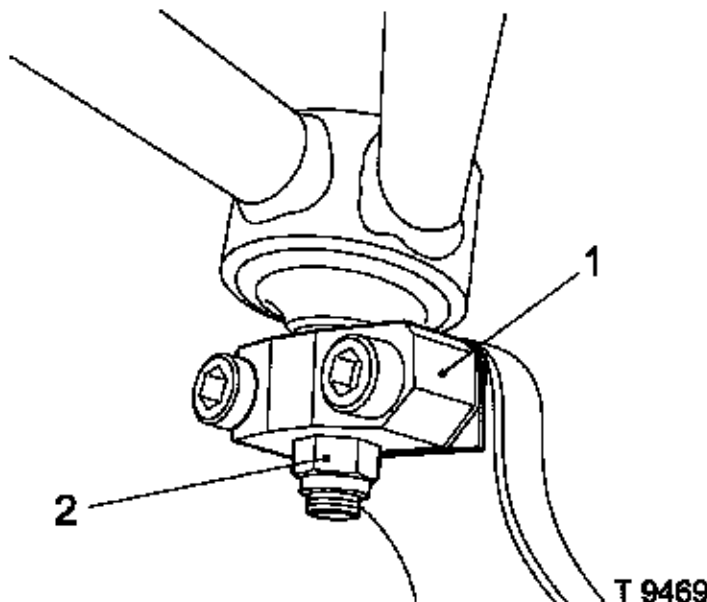


Upper wishbone from chassis – bolts, nuts, washers.



Install

Upper wishbone to chassis – bolts, nuts **45 Nm**, washers.

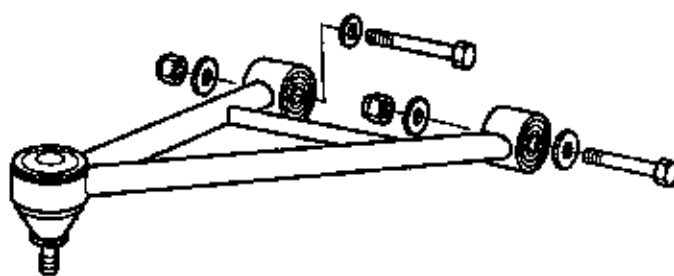

T9470

Upper swivel joint to upper ball joint carrier (1) – nut (2).

